

PUNTE SPECIALI PER FORI CIECHI


HW - SOLID CARBIDE HIGH PERFORMANCE SPECIAL DOWELL DRILLS

Body in Hw solide carbide - Shank D.10 mm. with flat and adjusting screw. Black and orange ring to select the rotation.Special chipfree negative spurs action.

303A

Codice HW - RH	Codice HW -LH	D. mm.	L. mm.	Lu mm.	S x A mm.
-------------------	------------------	-----------	-----------	-----------	--------------


					39
303.04 AR	303.04 AL	4	57.5	27	10x30
303.05 AR	303.05 AL	5	57.5	27	10x30
303.06 AR	303.06 AL	6	57.5	27	10x30
303.08 AR	303.08 AL	8	57.5	27	10x30

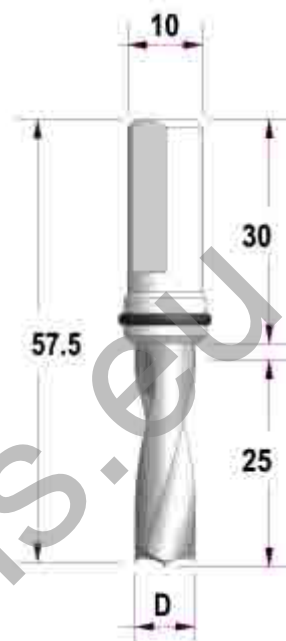

303B

Codice HW - RH	Codice HW -LH	D. mm.	L. mm.	Lu mm.	S x A mm.
-------------------	------------------	-----------	-----------	-----------	--------------

					10x39
303.03 BR	303.03 BL	3	70	35	10x30
303.04 BR	303.04 BL	4	70	35	10x30
303.05 BR	303.05 BL	5	70	35	10x30
303.06 BR	303.06 BL	6	70	35	10x30
303.08 BR	303.08 BL	8	70	35	10x30

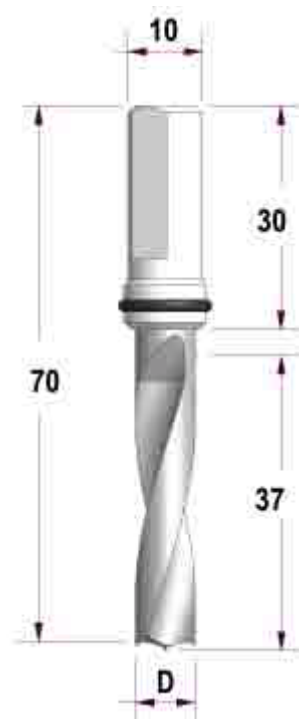

Corpo in HW integrale - Gambo D.10 mm. con piano e vite di regolazione. Incisori ad affilatura negativa. Anello di colore nero per rotazione destra e colore arancio per rotazione sinistra.